


INDUCTION MOTOR
(OUTDOOR USE)

RoHS

TOP
RUNNER

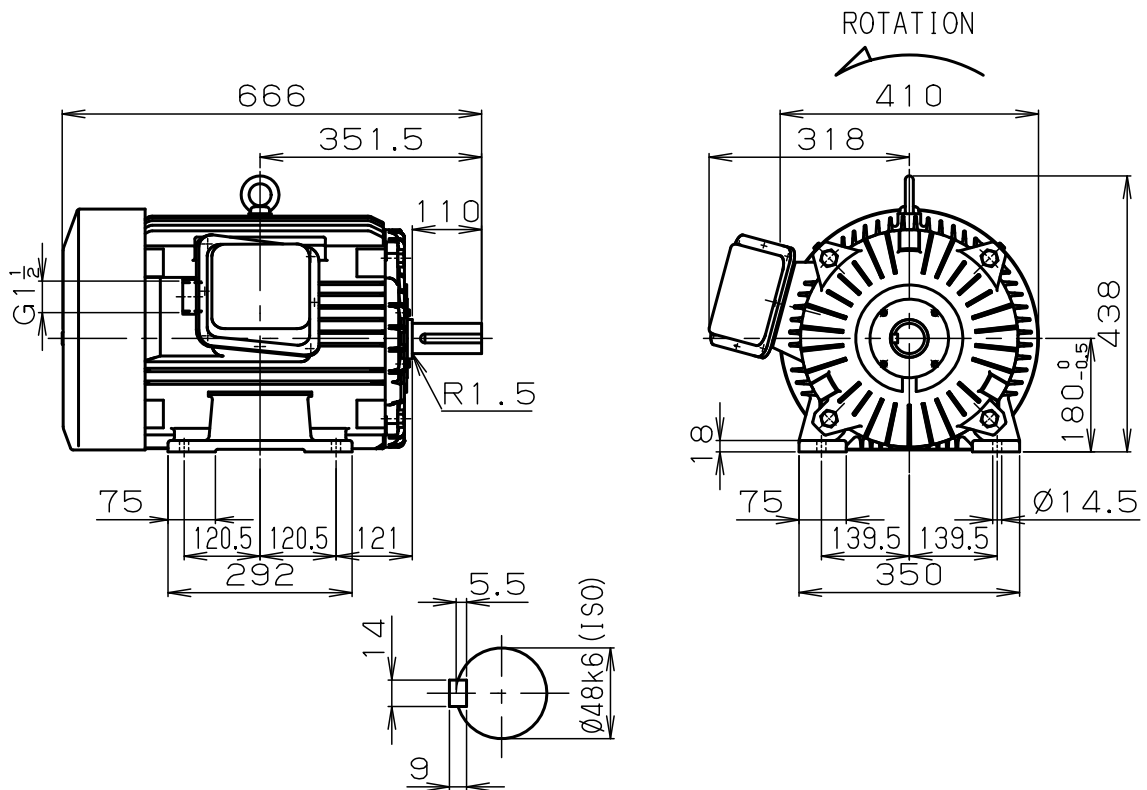

SHAFT EXTENSION

DIMENSIONS IN mm

HIGH VOLTAGE		CONNECTION	LOW VOLTAGE	
STARTING	RUNNING		STARTING	RUNNING

MLU1185B	180M	2	3	22kW	200-400/200-400 220-440	50/60	2960/3550 3560
TYPE	FRAME	POLES	PH	OUTPUT	VOLT	Hz	min ⁻¹
74-37/74-37 67-34		S1	155 (F)	マンセル N1.2	IP55	JISC4213	IC411
A M P		RATING	INSUL	COLOR	PROTECTION	RULE	COOLING
93.3/92.4 93.0%		IE3/IE3 IE3				D-END	6312ZZC3
E F F		IE CODE				N-END	6310ZZC3
						BEARING	

CUSTOMER :

W. OD.

VIA :

ORDER NO.

APPLICATION :

W. NO. Y0099

DATE	NAME	APPROVED		Fuji Electric Co., Ltd.	
DRAWN					
CHECKED				DWG. NO	YH548202